

Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



### Specifications


Model No.		CM-216C-72W-F
General	Input Watt	12W-14W
	Lumen	230 Lm
	CCT	6000-6500K
	Input Voltage	AC120V-347V
	Output Voltage	12V
	CRI	>80
	Beam Angle	30 Degree
	Hours Rated	50000 hours
Electrical	Dimension	12" X 3.0" X 12.4"
	Operating Frequency	50/60 Hz
	Power Factor	>0.5
Physical	Operating Temperature	5°C To 30°C (41°F To 86°F)
	Lens Material	PC
	Housing Color	White
Additional Information	Weight(Kg)	4.2
	Additional Info	Remote Head
	Warranty	5 Years
Compliance	MAX. Remote LOAD	72W
	Safety Listing	CSA
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No

### Features & Specifications


<b>Construction</b>	<ul style="list-style-type: none"> <li>• Steel housing and thermal plastic remote heads</li> <li>• High efficiency LED</li> <li>• Include 3ft power cord</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Universal wall mount</li> </ul>
<b>Performance Data</b>	<ul style="list-style-type: none"> <li>• 120/347VAC input</li> <li>• 12V 7Ah Lead Acid Battery</li> <li>• Two 2W LED heads</li> <li>• Diagnostic/pilot LED for AC ON and Charge</li> <li>• Push button test switch</li> <li>• Charging time: 24 hours</li> </ul>
<b>Compliances</b>	<ul style="list-style-type: none"> <li>• Damp locations</li> <li>• CSA meets all requirement in C22.2 No.141 -15, Suitable for Canada market</li> </ul>

### Dimensions & Weights

Model	CM-216C-72W-F
Length in.(cm)	12(30.6)
Width in.(cm)	3 (7.5)
Height in.(cm)	12.4 (31.4)
Weight(kg)	4.2

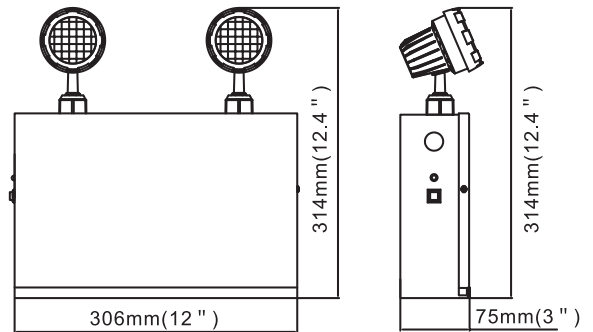

### Product Details

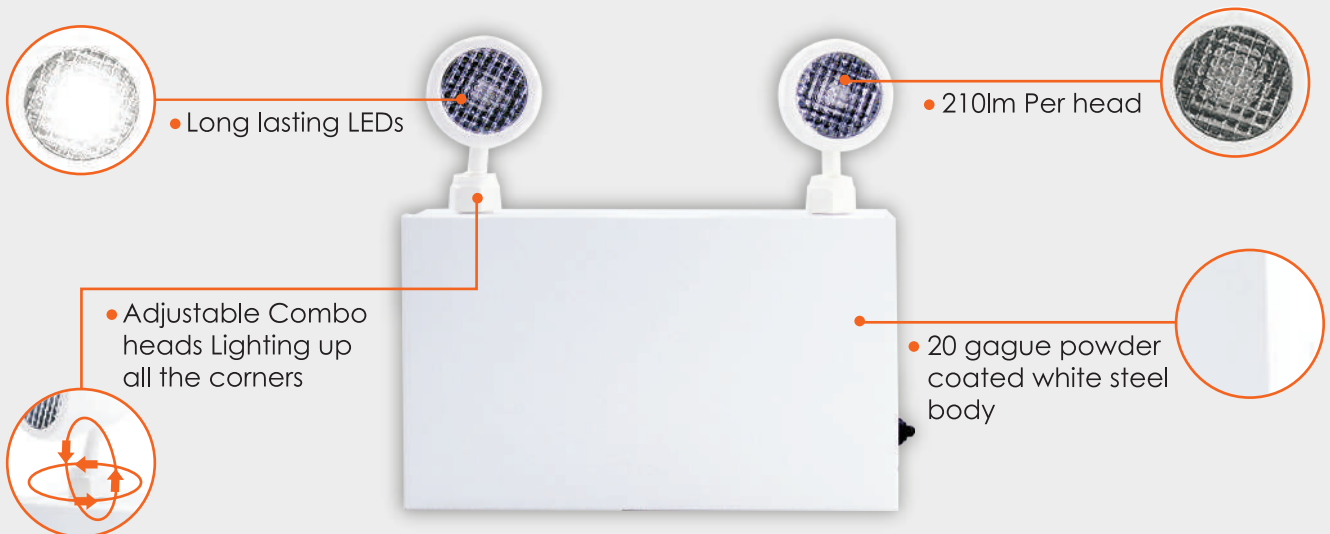

### Accessories


Order Code	Order Option
Spider Plate	Included
Screws & Bushing	Included
Wire Nut	Included
Power Cord	Included



Spider Plate



Screws & Bushing



Wire Nut



Power Cord

### Rating Table

Model No.	Input Ratings				Emergency Output Ratings		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (ma)	watts	Integral	Remote	Minutes	Hours
CM-216C-72W-F	120-347V	50/60	100-45	12-14W	2*2W	72W	30	24

### Battery Back Up Details

Model	Battery Backup Time
4W	9 Hours
18W	120 mins
24W	90 mins
72W	30 mins



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

