


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

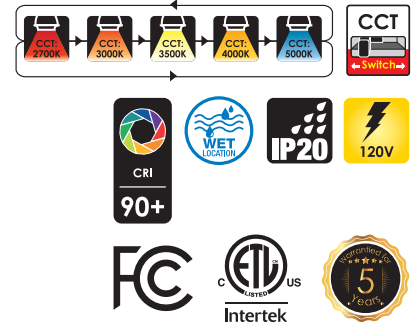

Specifications


Model No.		<input type="checkbox"/> VO-DSK4W9-120-5WAY	<input type="checkbox"/> VO-DSK6W11-120-5WAY
General	Size	Ø 4.0"	Ø 6.0"
	Watts	9W	11W
	Lumen	700LM	1000LM
	CCT	2700K/3000K/3500K/4000K/5000K	2700K/3000K/3500K/4000K/5000K
	Volts	120V	120V
	CRI	>90	>90
	Beam Angle	120°	120°
	Hours Rated	50000 hours	50000 hours
	Min Compartment Size	Ø 6.0" X 1.0"	Ø 7.5" X 1.0"
	Electrical	Operating Frequency	60Hz
Power Factor		>0.9	>0.9
Operating Position		Both Horizontal&Vertical	Both Horizontal&Vertical
Surge Protection		Built-in surge protection-2.5KV	Built-in surge protection-2.5KV
Operating Temperature		-20°C /-4°F to 40°C/104°F	-20°C /-4°F to 40°C/104°F
Physical	Lens Material	PC	PC
	Housing Color	White	White
	Weight (Kg)	0.116	0.175
Additional Information	Additional Info	5 way CCT	5 way CCT
	Warranty	5 years	5 years
Compliance	Safety Listing	CETLus-Listed	CETLus-Listed
	Location Rating	Wet Location	Wet Location
	Energy Star	No	No
	DLC Approved	No	No

Features & Specifications


Construction	<ul style="list-style-type: none"> • Plastic Housing with PC lens • Multiple LED array for uniform illumination • CCT switches and Mode switches are placed discretely on the back
Mounting	<ul style="list-style-type: none"> • Easy installation for remodel or new construction applications
Performance Data	<ul style="list-style-type: none"> • Available in 2700K/3000K/3500K/4000K/5000K selectable color temperature • 90+ CRI • Electrical ratings: 120v • Estimated life of over 50000 hours to L70 • 2.5kV surge protection (standard) • Operating temperature: -20°C /-4°F to 40°C/104°F
Compliances	<ul style="list-style-type: none"> • cETL certified for wet location • IP20

Dimensions & Weights

Model	VO-DSK4W9-120-5WAY	VO-DSK6W11-120-5WAY
Diameter in (mm)	Ø 6.0"(155 mm)	Ø 7.5"(190 mm)
Height in (mm)	Ø 1.0"(26 mm)	Ø 1.0"(26 mm)
Net weight Kgs (lbs)	0.115Kgs(0.255 lbs)	0.385Kgs(0.174 lbs)

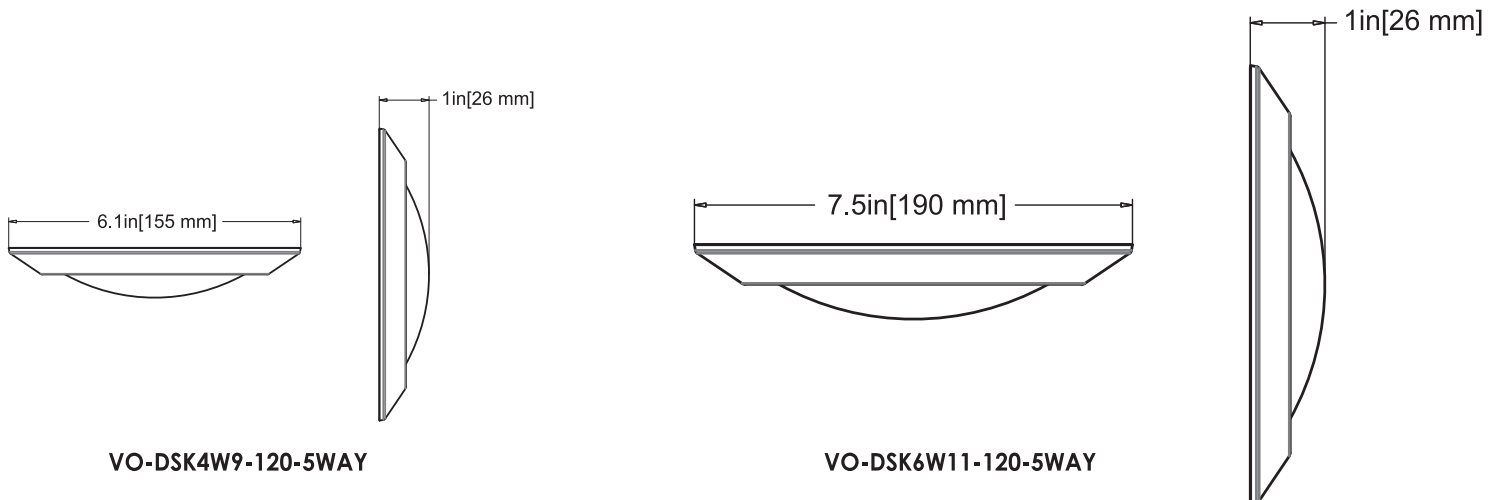

Product Details

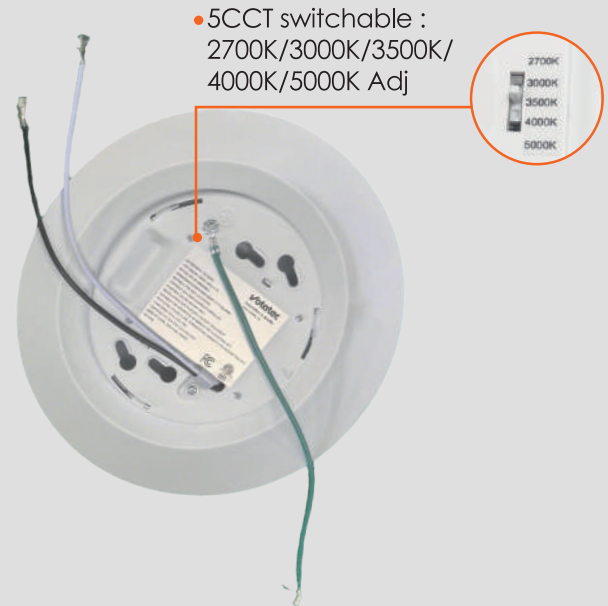

Accessories

Accessories	Compatible With
Wire Nut	VO-DSK4W9-120-5WAY/VO-DSK6W11-120-5WAY
Junction Box Screw	VO-DSK4W9-120-5WAY/VO-DSK6W11-120-5WAY



Wire Nut



Junction Box Screw

Lumen Details

Model No.:	Watts (w)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-DSK4W9-120-5WAY	9W	700	78	750	83	750	83	750	83	700	78
VO-DSK6W11-120-5WAY	11W	950	86	1000	91	1000	91	1000	91	950	86

