

Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



## Specifications


Model No.		<input type="checkbox"/> SS-SR05-600W-25-H-MV-TP(50)	<input type="checkbox"/> SS-SR05-1200W-25-H-MV-TP(50)
General	Watts	600W/500W/400W/300W	1200W/1000W/900W/800W
	Lumen	102000LM/85000LM/68000LM/51000LM	204000Lm/170000Lm/153000Lm/136000Lm
	CCT	5000K	5000K
	Volts	AC120-347V	AC120-347V
	CRI	Ra>70	Ra>70
	Beam Angle	25°	25°
	Hours Rated	50000 hours	50000 hours
Electrical	Operating Frequency	50/60HZ	50/60HZ
	Power Factor	>0.9	>0.9
	Surge Protection	10KV	10KV
	Operating Temperature	-40°C to 45°C (-40°F to 113°F)	-40°C to 45°C (-40°F to 113°F)
Physical	Lens Material	PC	PC
	Housing Color	Black	Black
	Weight	10.89Kgs	20.9Kgs
	IK Rating	IK08	IK08
Additional Information	Additional Info	Power Adjustable	Power Adjustable
	Warranty	5 Years	5 Years
Compliance	Safety Listing	cULus-Listed	cULus-Listed
	Location Rating	Wet	Wet
	Energy Star	No	No
	DLC Approved	Yes, DLC 6.0 premium	Yes, DLC 6.0 premium
	DLC ID	Under Application	Under Application

### Features & Specifications


<b>Construction</b>	<ul style="list-style-type: none"> <li>• Clear polycarbonate lens over LEDs provides a high light efficacy</li> <li>• Power Select switches are inside the driver housing</li> <li>• 6' power cable and 6' dimming cable included in all luminaires</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Bracket installation</li> </ul>
<b>Performance Data</b>	<ul style="list-style-type: none"> <li>• 70+ CRI</li> <li>• Electrical ratings: 120-347 VAC</li> <li>• Estimated life of over 100 000 hours to L70</li> <li>• Sosen 0-10 V dimming driver</li> <li>• 10kV surge protection (standard)</li> <li>• Operating temperature: -40°C to 45°C (-40°F to 113°F)</li> </ul>
<b>Compliances</b>	<ul style="list-style-type: none"> <li>• cULus certified for wet locations</li> <li>• DLC 6.0 Premium</li> </ul>

### Dimensions & Weights

Model No.	SS-SR05-600W-25-H-MV-TP(50)	SS-SR05-1200W-25-H-MV-TP(50)
Size in. (mm)	15.97x14.23x11.19 in (405x361x284 mm)	20.98x19.27x15.09 in ( 533x490x383 mm)
Net Weight kgs(lbs)	10.89Kgs(24.03lbs)	20.9Kgs(46.08lbs)

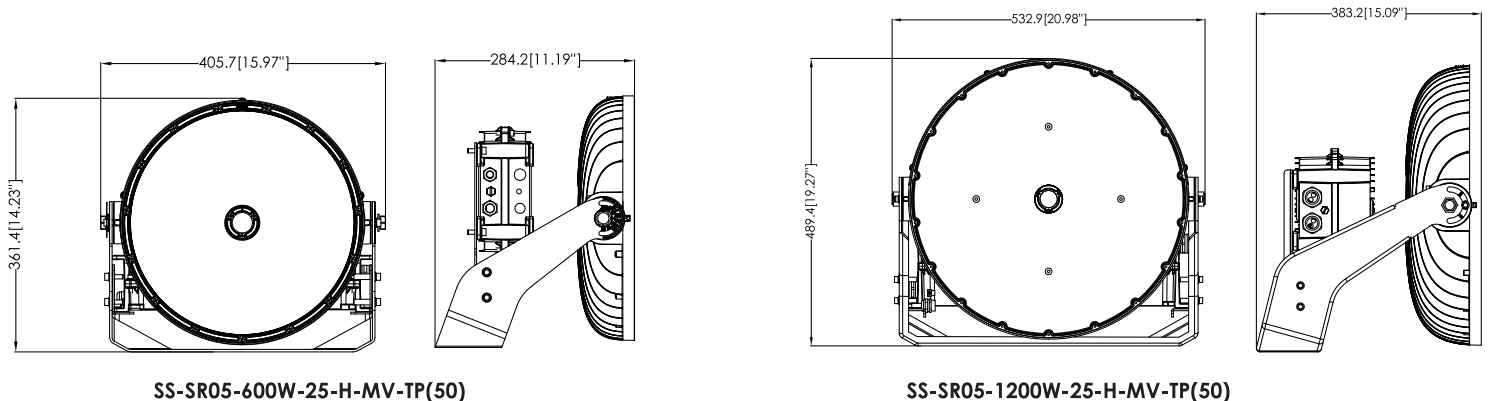

### Product Details

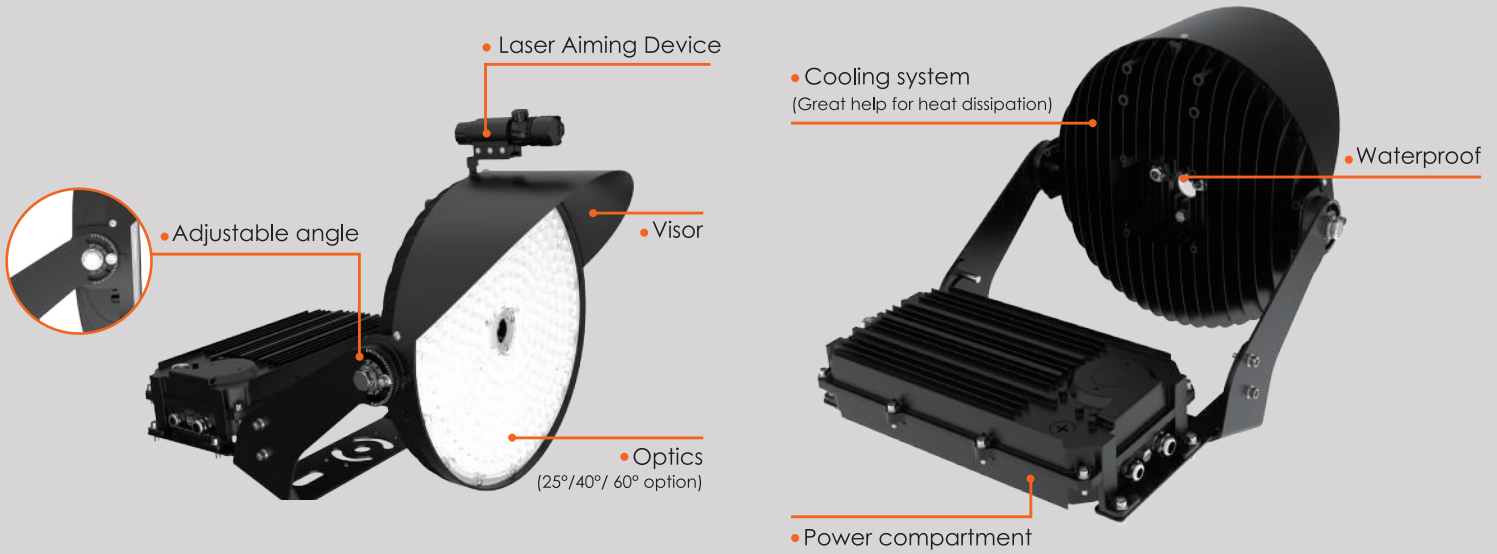

### Accessories

Order Code	Compatible with	Order Option
Accessory bag	SS-SR05-600W-25-H-MV-TP(50) SS-SR05-1200W-25-H-MV-TP(50)	Included
40° lens	SS-SR05-600W-25-H-MV-TP(50) SS-SR05-1200W-25-H-MV-TP(50)	Order separately
60° lens		
Visors		
Laser		



Accessory bag



40° / 60° Lens



Visor



Laser

### Lumen Details

Model No.:	Watts (W)	5000K
		Lumen Output (LM)
SS-SR05-600W-25-H-MV-TP(50)	600W	102000Lm
	500W	85000Lm
	400W	68000Lm
	300W	51000Lm
SS-SR05-1200W-25-H-MV-TP(50)	1200W	204000Lm
	1000W	170000Lm
	900W	153000Lm
	800W	136000Lm



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

