

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications


Model No.		☐ PVT5-4FT-24WB4GJS-26K
General	Size	4'
	Watts	24W
	HID Equivalent	54W
	Lumen	3000LM
	Base	G13
	CCT	3500K/4000K/5000K/6500K ADJ
	Volts	AC120-347V
	CRI	>83
	Beam Angle	180°
	Hours Rated	50,000 hours
	Max Compartment Size	Length: 45.2in. Width: 0.6in
	Ballasting Requirements	Ballast Bypass
Electrical	Operating Frequency	50-60Hz
	Power Factor	>0.9
	Wiring	Any 2 pins connected
	Operating Position	Both Horizontal & Vertical
	Surge Protection	Ring Wave Surge 2.5KV
	Operating Temperature	-20°C (-4°F) TO 45°C (113°F)
Physical	Housing Material	Glass with PET Coating
	Housing Color	Milky
	Net Weight (Kg)	0.14
Additional Information	Additional Info	4 CCT Adjustable
	Warranty	5 years
Compliance	Safety Listing	cULus-Listed
	Location Rating	Dry
	DLC Approved	Yes, DLC 6.0
	DLC ID	Under application

Features & Specifications


Construction	- Built-in LED driver - Single and Double-ended direct AC120-347V input work with any 2 or more pins wired, provides easy installation 4CCT selectable, save inventory - Shatterproof design, lower the breakage rate also safe for shipping
Performance Data	- Available in 3500K/4000K/5000K/6500K selectable color temperature 83+ CRI - Electrical ratings:120-347V - Estimated life of over 100 000hours to L70 0-10V dimming and Reverse Phase-cut dimming - Operating temperature: -20°C(-4°F) to 45°C(113°F)
Compliances	- cULus certified - Meets NSF requirements (Splash Zone and Non Food Zone) - DLC 6.0 Listed

Dimensions & Weights



Model	PVT5-4FT-24WB4GJS-26K
Length in.(mm) A	45.2" (1149mm)
Length in.(mm) B	45.5" (1156.1mm)
Length in.(mm) C	45.7" (1163.2mm)
Diameter in. (mm)	0.6" (16mm)
Net Weight Kgs.(lbs)	0.14 Kgs(0.31 lbs)

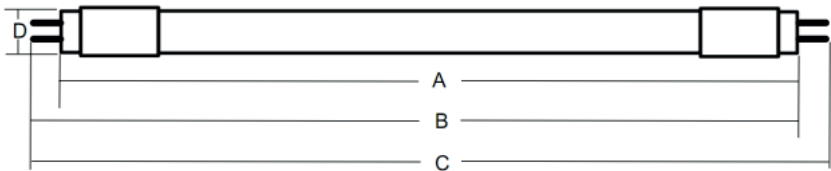

Product Details

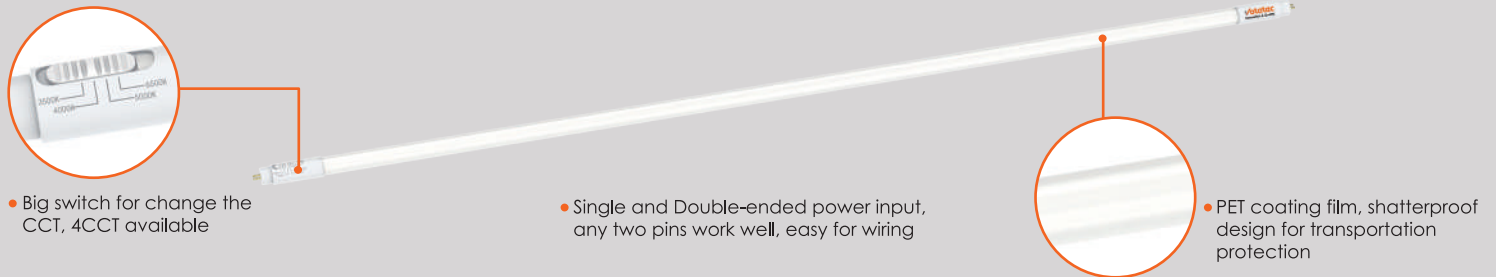


Luminous intensity Distribution Diagram

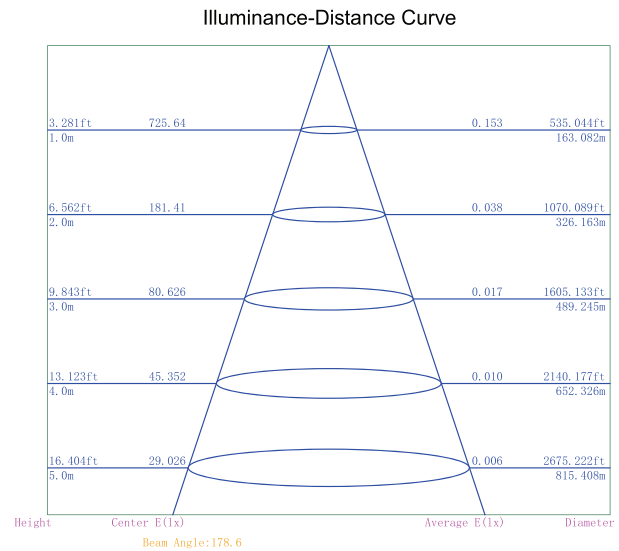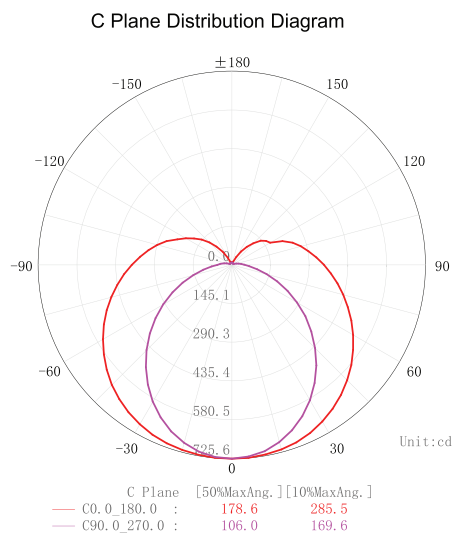


Wiring Diagram

Double-ended power input




OR




Voltage Input: AC 120-347V 50/60Hz

Single-ended power input




OR



Voltage Input: AC 120-347V 50/60Hz

Wiring Diagram

Direct AC wiring diagram with Reverse-Phase (ELV) Dimmer

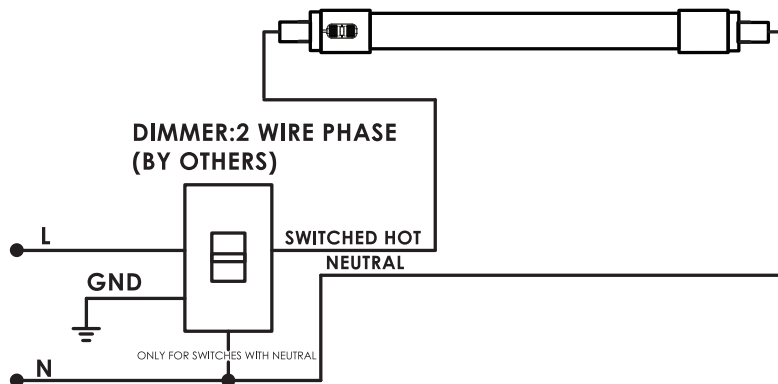

Note: For detailed applications, please refer to the dimmer instruction manual.

Reverse Phase-cut Dimmers Compatibility List

BRAND	MODEL NUMBER	BRAND	MODEL NUMBER
LUTRON	DVELV-300P-BR	LUTRON	DVELV-303P-WH
LUTRON	DVELV-300P-GR	LUTRON	MAELV-600-AL
LUTRON	DVELV-300P-IV	LUTRON	MAELV-600-BL
LUTRON	DVELV-300P-LA	LUTRON	MAELV-600-BR
LUTRON	DVELV-300P-WH	LUTRON	MAELV-600-GR
LUTRON	DVELV-303P-BR	LUTRON	MAELV-600-IV
LUTRON	DVELV-303P-GR	LUTRON	MAELV-600-LA
LUTRON	DVELV-303P-IV	LUTRON	MAELV-600-WH
LUTRON	DVELV-303P-LA		

