


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____

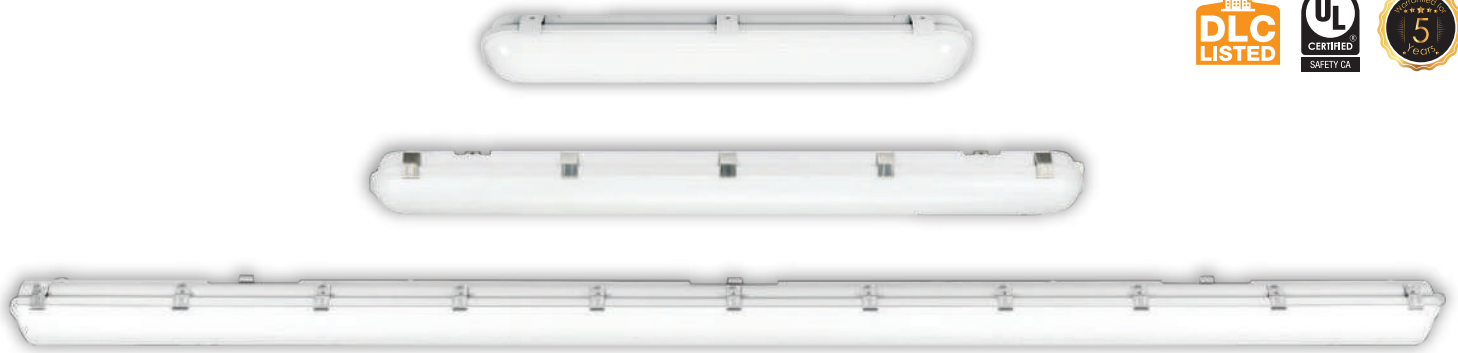

Specifications


Model No.		☐ VO-VP24W2FT-347-5WAY-S	☐ VO-VP48W4FT-347-5WAY-S	☐ VO-VP100W8FT-347-5WAY-S
General	Size	2ft	4ft	8ft
	Watt	24W/20W/17W/13W/10W	48W/41W/34W/27W/20W	100W/89W/82W/75W/68W
	Sensor	Sensor Base Included	Sensor Base Included	Sensor Base Included
	Lumen	3480lm/3190lm/2900lm/ 2465lm/2175lm	6960lm/6525lm/5800lm/ 5075lm/4350lm	14500lm/13050lm/11600lm/ 10150lm/8700lm
	Base	PC	PC	PC
	CCT	3000K/3500K/4000K/5000K/ 6500K Adj	3000K/3500K/4000K/5000K/ 6500K Adj	3000K/3500K/4000K/5000K/ 6500K Adj
	Volts	120-347V	120-347V	120-347V
	CRI	>80	>80	>80
	Beam Angle	110°	110°	110°
	Hours Rated	≥ 50,000hours	≥ 50,000hours	≥ 50,000hours
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz
	Power Factor	>0.9	>0.9	>0.9
	IP Rating	IP66	IP66	IP66
	Operating Temperature	-40°F~104°F(-40°C~40°C)	-40°F~104°F(-40°C~40°C)	-40°F~104°F(-40°C~40°C)
	Relative Humidity	10%-90%RH	10%-90%RH	10%-90%RH
Physical	Lens Material	PC	PC	PC
	Housing Color	Grey	Grey	Grey
	Weight (kg)	1.23	2.41	5.83
Additional Information	Additional Info	0-10V dimmable	0-10V dimmable	0-10V dimmable
	Rated For Enclosed Fixture	Yes	Yes	Yes
	Warranty	UL,FCC,DLC	UL,FCC,DLC	5 Years
Compliance	Certificates	5 Years	5 Years	UL,FCC,DLC
	Energy Star	No	No	No
	DLC Approved	Yes, DLC 6.0	Yes, DLC 6.0	Yes, DLC 6.0
	DLC ID	Under Application	Under Application	Under Application

Features & Specifications


	Construction	• 5 CCTs and 5 Powers can be adjusted by switching • PC lens+ PC base for materials • Save up to 60% in electricity consumption compared to fluorescent lighting fixture • Easy to install with expansion screws and screws • Sensor Base Included • NOT suitable for harsh environments such as the seaside (high salinity) or pool area (high chlorine & moisture)
	Mounting	• Ceiling mounted , wall mounted, surface mounted
	Performance Data	• IP66 LED Module waterproof luminaire • Electrical ratings: 120-347V • Operating temperature: -40°F to 104°F (-40°C to 40°C) • 0-10V dimming driver • Available in 3000K/3500K/4000K/5000K/6500K selectable color temperature • Estimated life over 50000 hours
	Compliances	• DLC 6.0 Standard • cULus certified for wet locations

Dimensions & Weights


Model No.	2FT	4FT	8FT	Connector
L (inches/mm)	23.62"(600mm)	47.24"(1200mm)	94.50"(2400mm)	1.61"(41mm)
W (inches/mm)	4.96"(126mm)	4.96"(126mm)	4.92"(128mm)	0.94"(24mm)
H (inches/mm)	3.60"(93mm)	3.60"(93mm)	3.94"(103mm)	1.06"(27mm)
Weights (kg/lbs)	1.23 kg/2.71lbs	2.41kg/5.29lbs	5.83kg/12.78lbs	0.013kgs/0.029lbs

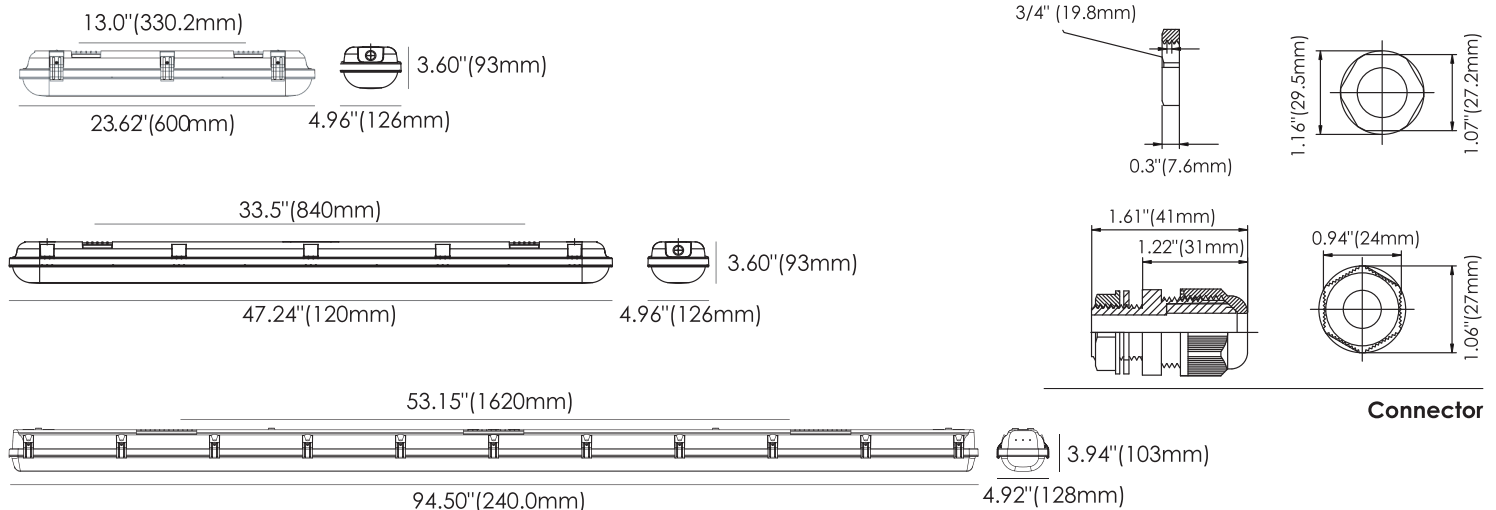

Product Details

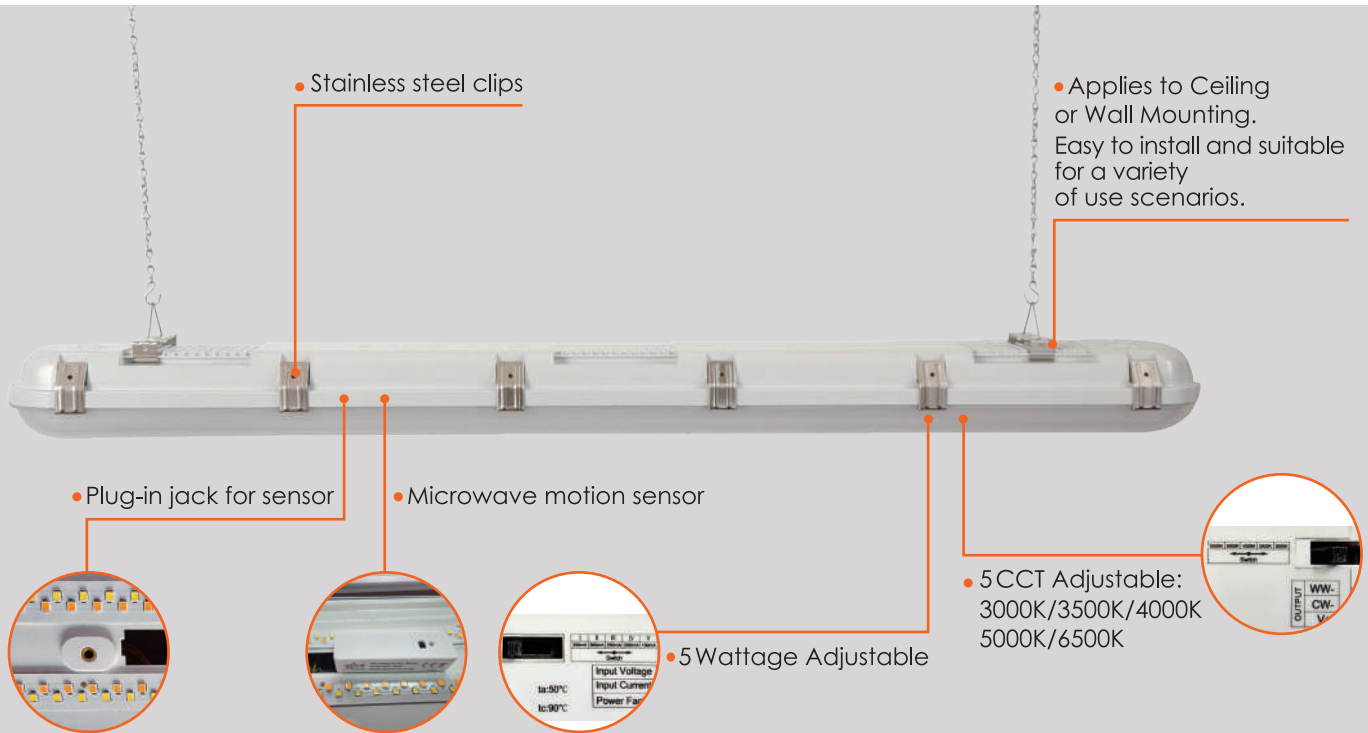

Light Distribution Testing Parameters

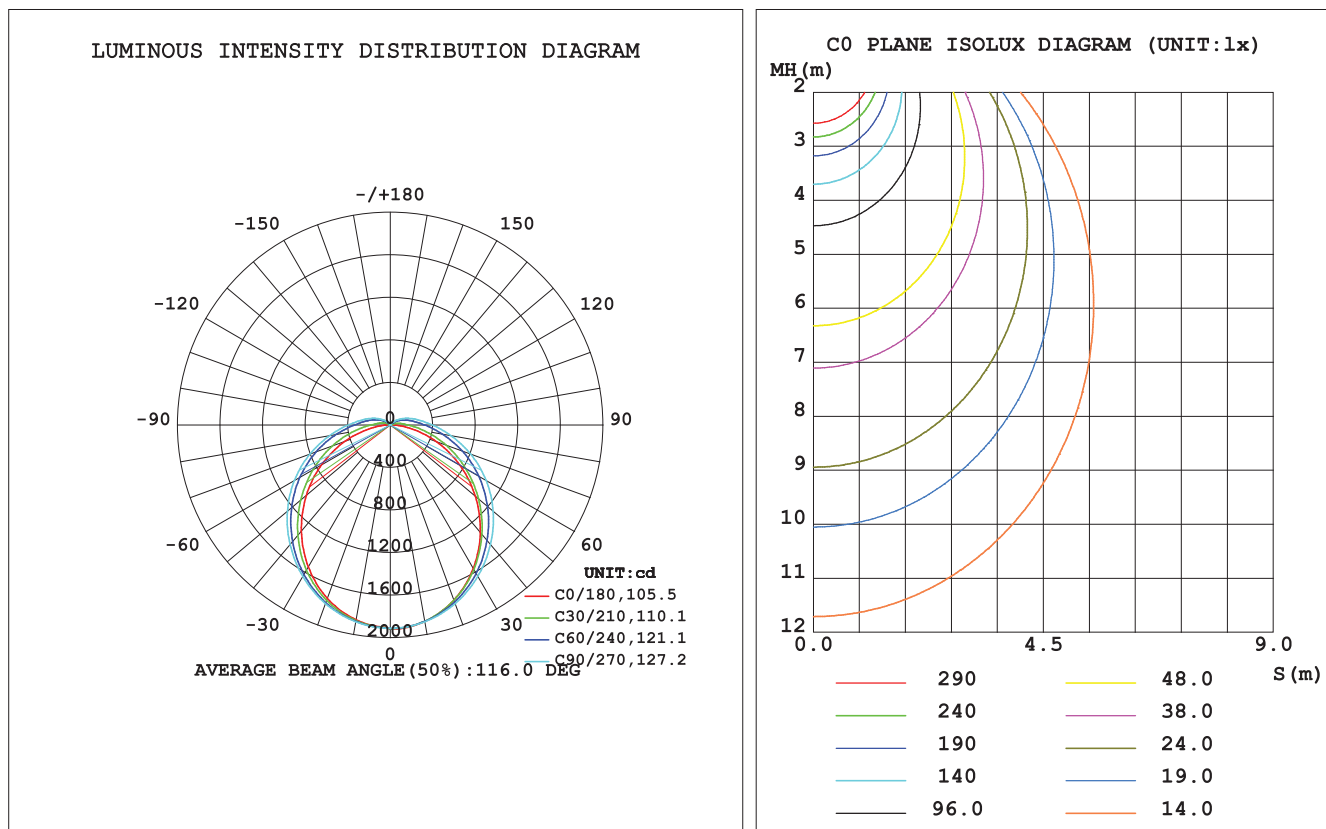

Occupancy Sensor (Optional)

Part Number	Position	Volt (V)	Technology	Height (ft)	Detection Area(%)	Time setting (Min)	Light control (Lux)	IP rating	Temperature (°C)
ANT-1M-5T	plug-in Sensor	10-14VDC	Microwave motion sensor	Max 12ft (4m)/360°	100%/75%/50%/20%	Test/30s/1min/5min/10min/20min/30min/1h	10Lux/30Lux/50Lux	IP66	-40°F~+158°F (-40°C ~+70°C)

Note:

This product offers three levels of light control:

100% brightness → dimmed light (0%, 10%, 30%, 50%) → off.

It features selectable waiting periods (motion hold time and 24 hours), adjustable daylight threshold, and flexible detection area settings

If the natural light level is higher than the selected light-control setting

(10 lux, 30 lux, 50 lux), the light will not switch on automatically (0%, 10%, 30%, 50%).

When a person enters the room, the light turns on to 100%. After the person leaves, and the hold time has elapsed, the light changes to the standby level.

Default Setting:

Brightness: 100%

Hold Time: 5 min

Stand-by Dim Level: 30%

Stand-by Time: 60Min

Sensitivity: 100%

Day Light: Off



Microwave motion sensor

Accessories

Order Code	Compatible with	Order Option
Remote Control	VO-VP24W2FT-347-5WAY-S VO-VP48W4FT-347-5WAY-S VO-VP100W8FT-347-5WAY-S	Order separately
Stainless Steel Clips	VO-VP24W2FT-347-5WAY-S VO-VP48W4FT-347-5WAY-S VO-VP100W8FT-347-5WAY-S	Included
Accessory bag	VO-VP24W2FT-347-5WAY-S VO-VP48W4FT-347-5WAY-S VO-VP100W8FT-347-5WAY-S	Included
Sensor	VO-VP24W2FT-347-5WAY-S VO-VP48W4FT-347-5WAY-S VO-VP100W8FT-347-5WAY-S	Order separately



Remote Control



Accessory bag



Sensor

Lumen Details

Model No.	Power(w)	Lumen	3000K	3500K	4000K	5000K	6500K	Switch Current	Efficiency (LM/W)	Voltage
VO-VP24W2FT-347-5WAY-S	24	3400	3350	3370	3400	3420	3450	350mA	142	120-347V
	20	2800	2750	2770	2800	2820	2850	300mA	140	
	17	2400	2350	2370	2400	2420	2450	250mA	141	
	13	1900	1850	1870	1900	1920	1950	200mA	146	
	10	1500	1450	1470	1500	1520	1550	150mA	150	
VO-VP48W4FT-347-5WAY-S	48	7000	6900	6950	7000	7050	7100	350mA	146	
	41	6000	5900	5950	6000	6050	6100	300mA	146	
	34	5000	4900	4950	5000	5050	5100	250mA	147	
	27	4000	3900	3950	4000	4050	4100	200mA	148	
	20	3000	2900	2950	3000	3050	3100	150mA	150	
VO-VP100W8FT-347-5WAY-S	100	14600	14500	14550	14600	14650	14700	700mA	146	
	89	13000	12900	12950	13000	13050	13100	650mA	146	
	82	12000	11900	11950	12000	12050	12100	600mA	146	
	75	11000	10900	10950	11000	11050	11100	550mA	147	
	68	10000	9900	9950	10000	10050	10100	500mA	147	

