


Project : _____
Type : _____
Drawn by : _____
Catalogue No. : _____
Date : _____



Specifications


Model No.		☐ W3-10-50
General	Watts	100W
	Lumen	13,000LM
	CCT	5000K
	Volts	120V
	CRI	Ra≥80
	Beam Angle	360°
	Hours Rated	50000 hours (L70B50@35°C)
	Light Efficiency	130lm/W @5000K
	SDCM	≤7
Electrical	Operating Frequency	60Hz
	Power Factor	≥0.9
	Surge Protection	Built-in surge protection-6KV
	Operating Temperature	-40°C /-40°F to 45°C/113°F
Physical	Lens Material	PC
	Housing Color	Orange
	Weight (Kg)	2Kg±0.5
Additional Information	Rated for Enclosed Fixture	No
	Warranty	5 years
Compliance	Safety Listing	CULus-Listed
	Location Rating	Damp Location
	Energy Star	No
	DLC Approved	No

Features & Specifications

Construction	- Foldable hook - On/Off Switch - SJTW 16/3 AWG10ft cord+plug - Metal Guard; Linkable up to 12 Units in Series
Mounting	Hook and hang mount
Performance Data	- Available in 5000 K color temperature 80+ CRI - Electrical ratings: 120 V - Estimated life of over 100 000 hours to L70 6kV surge protection (standard) - Operating temperature: -40°C to 45°C (-40°F to 113°F)
Compliances	- cULus certified for damp locations - IP40

Dimensions & Weights

Model	W3-10-50
Length in. (mm)	6.1" (155 mm)
Width in. (mm)	6.1" (155 mm)
Height in. (mm)	11.4" (290 mm)
Net weight (lbs)	2Kgs (4.41 lbs)

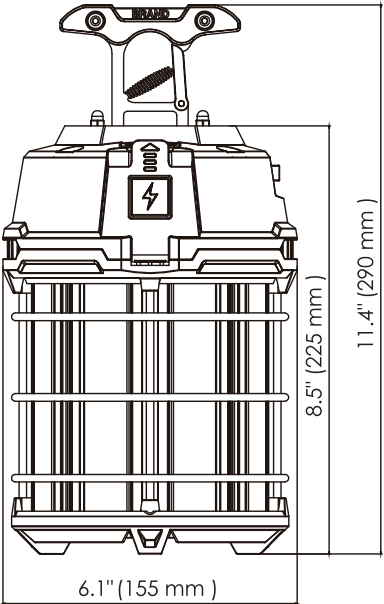

Product Details

