

## INSTRUCTION MANUAL

Read this instruction carefully before installation. Keep it for further reference. Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation. This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
TS-TPL8-4FT200W-H-347-TCP(MS)	160W /180W /200W	AC120-347V (50/60Hz)	30000lm	150lm/w	3500K 4000K 5000K	120°	>70	>0.9	5 Years

### Microwave Sensors


Model No.	ANT-7	Microwave frequency	5.8GHz±75MHz
Dim controle Output	0-10V	Detection range	4-6m (ceiling mounted)

#### WARNING:


- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaire electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation.
- ⚠ Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
- ⚠ DO NOT exert force on the surface of the fixture.

## Installation Manual


1. Push down to open the latch.

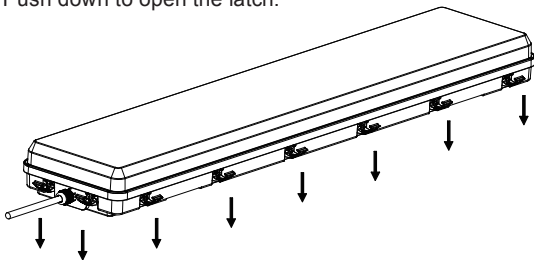


2. Open the lens.

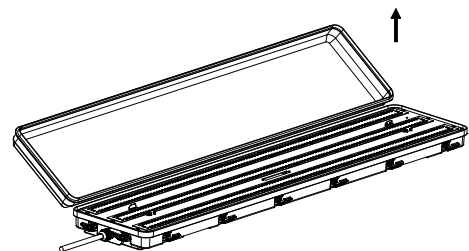


3. Choose the desired Wattage and CCT using switches to best suit the application for which the fixture is installed.

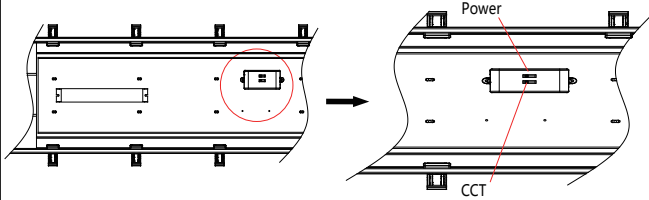

4. Loosen the plastic end cap with a special screwdriver, take out the input wire from accessory bag, and then tighten the PG joint and connect the input wire to the corresponding terminal.

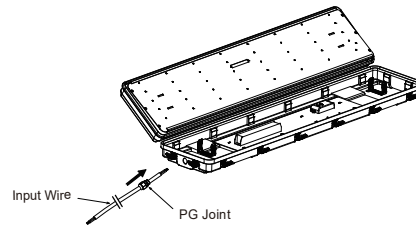


5. Secure Lens to Housing by clamping Latch down. Be careful not to pinch the wires. Check that the Gasket is fully seated.

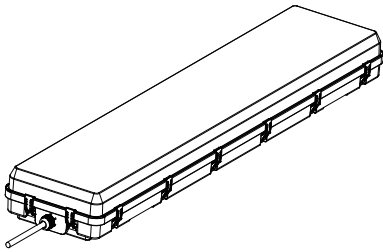


6. Connect the electric supply and the AC input wires of the fixture according to the following wiring instructions.

**WARNING:** To prevent wiring damage or abrasion, do not expose wiring to edges of sharp objects.

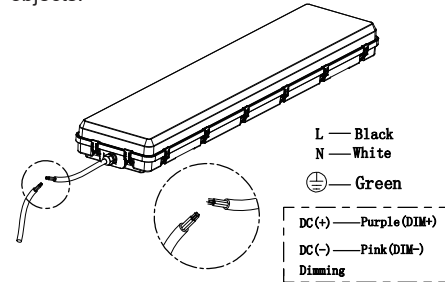


7. Select the appropriate installation method for fixing according to the use environment (steps 5 and 6 can be adjusted according to the actual installation method).




## Suspended Installation (sold separately)


### Parts List

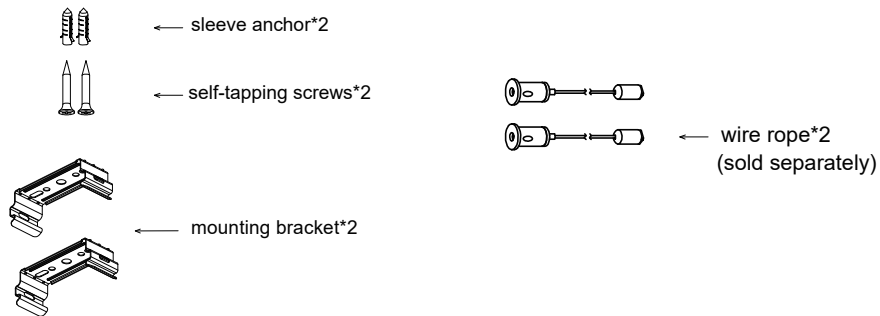


1. Drill hole in the wall, install the fixing base with a screw and a plastic expansion tube.



2. Hang the mounting clip to the hook of suspension cable.

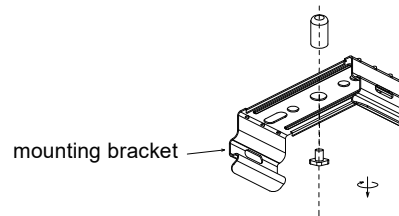

3. Push the fixture into mounting clip for fixing.

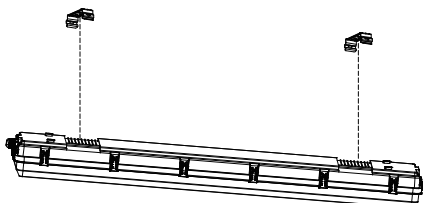

4. Turn on the lights after installation.

