



Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

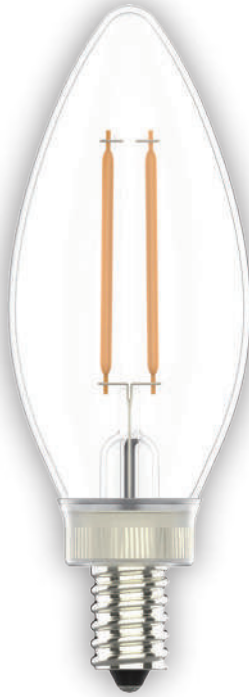

VO-FCAW3.8-120

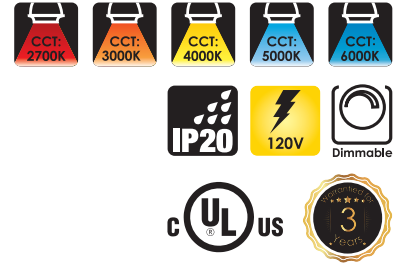

VO-FCA-WH-3.8-120
(White Filament)

Specifications

Model No.		<input type="checkbox"/> VO-FCAW3.8-120	<input type="checkbox"/> VO-FCA-WH-W3.8-120
General	CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K
	Watts	3.8W	3.8W
	Lumen	300Lm	400Lm
	Base	E12(Anti-shock)	E12(Anti-shock)
	Volts	120V	120V
	CRI	>80	>80
	Beam Angle	360°	360°
	Hours Rated	15,000Hrs	15,000Hrs
Product Size	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)	
Electrical	IP Grade	IP20	IP20
	Power Factor	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	Glass	Glass
	Bulb Head Color	Clear	Clear
	Weight (g)	14 (±2g)	14 (±2g)
Additional Information	Additional Info	Dimmable	Dimmable
	Rated For Enclosed Fixture	No	No
	Warranty	3 Years	3 Years
Compliance	Certification	cUL	cUL

Features & Specifications

Performance Data


- Available color temperature in 2700K/3000K/4000K/5000K/6000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection (standard)
- -20°C~+40°C (the best in 25°C)

Compliances

- cUL
- IP20


Dimensions & Weights

Model	VO-FCAW3.8-120
Diameter in. (mm)	1.38(35)
Height in. (mm)	3.92(99.5)
Net weight (g)	14 (±2g)

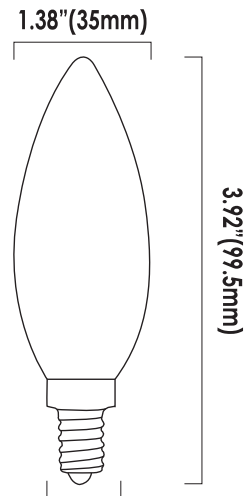

VO-FCAW3.8-120

Product Details

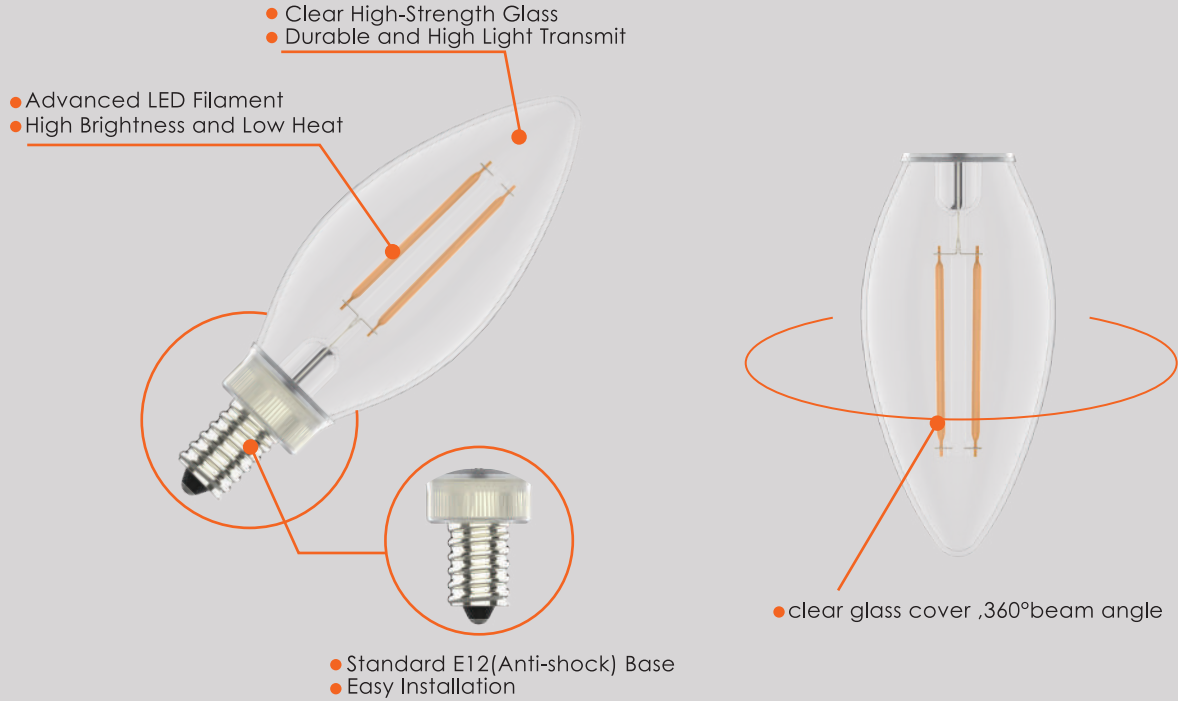

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FCAW3.8-120	3.8W	397	133	420	127	407	133	420	136	390	128
VO-FCA-WH-W3.8-120	3.8W	—	—	420	127	407	133	400	105	—	—



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

