Votatec
Innovation & Quality
www.votatec.ca

Mini Dual Head Emergency Light

CR-7068C

INSTALLATION INSTRUCTIONS

Package Contents

Part	Description	Quantity
1	Emergency Lighting	1
2	Hardware Kit	1

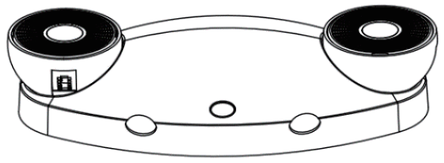

Warnings and Cautions

IMPORTANT SAFEGUARDS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electrical Code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not mount in hazardous locations, or near gas or electric heaters.
5. Do not let power cords touch hot surfaces.
6. Do not use outdoors.
7 Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than its intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.

SAVE THESE INSTRUCTIONS

Use Flexible Conduit Only



Mounting Instructions

NOTE: First turn off electricity.

Wall mounting (Max. mounting height: 15.6ft)

1.Remove mounting plate from fixture.



2.Knockout in back of mounting plate and push wires through the hole.



3.Securely attach mounting plate to J-box.



4.ELECTRICAL CONNECTIONS

Make the proper supply wire connections.

If using 120VAC, connect the black and White wires to the building utility.

If using 347VAC, connect the Red and White wires to the building utility.

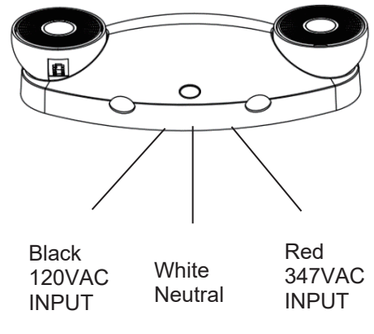

5. Connect the battery to connector on the PCBA.

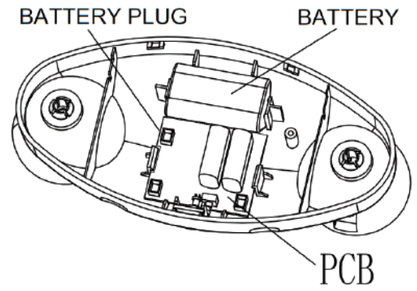

6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Restore power and press test button. Battery powered LED will come on, AC light will turn off.

Ceiling Mounting

1. Open top cover and knockout on the top of fixture.
2. Secure the mounting plate to tube with nut.



3. Reference step 4 - 7 in wall mounting above for ceiling mounting.